

Our success can be measured
by the savings we deliver



PROCOR
CHEMICALS, INC.

OUR OPERATIONS PROCESS



THE SMART CHOICE

Don't limit your well with inferior products. Learn how PROCOR CHEMICALS can stabilize your wellbore and get your well TD on time and on budget!

OUR PRODUCTS



BUSINESS SNAPSHOT

- We are competitive in most shale plays, offshore and deepwater
- Our product manufacturing is proprietary on each product
- Strong track record of success



Preventative LCM Products

HP PROFalt (High Performance PROFalt) a sulfonated asphalt blend is a proprietary blended water soluble additive that stabilizes shale formations, aids in API fluid loss control, and lowers HTHP fluid loss in water based/oil based drilling fluids. Packaged in 50 lb. sx./50 sxs. per pallet.

PRO Nite T is a natural hydrocarbon resin that is treated and specifically produced for water-based drilling fluid applications, although it can also be used in diesel-based muds and performs well in that environment. It is used for borehole stability, reducing and tightening wall cake, fluid loss control and ROP due to the slickening of the wellbore. Packaged in 50 lb. sx./50 sxs. per pallet.

PRO Sweep Aid is a blend of three high quality products designed specifically as an addition to your current sweep program. It consist of various particle sizes and shapes designed to increase your cuttings carrying capacity regardless of fluid type. It will stop moderate seepage and aid in cleaning your well bore and is not effected by saltwater influx. It is the base products of our "Aggressive LCM Sweeps / Pills" and works excellent for severe losses with simple additions of PRO V+ and SB Superceal. PRO Sweep Aid will also lower your fluid loss / HPHT in your current sweeps.

PRO TightCeal is a blend of three fibers of various particle sizes and shapes designed to control seepage and loss of circulation. The product is available in fine, medium, and coarse grades. Packaged in 25 lb. sx./50 sxs. per pallet.

SB SuperCeal is a unique blend of loss circulation materials, modified resin along with proprietary agents that can be used in all mud systems for sealing permeable formations. SB SuperCeal was specifically designed for use in oil or synthetic based mud systems due to its minimal effects on rheology, electrical stability (ES) and Low Gravity Solids (LGS). Its primary uses are to enhance wellbore stability, reduce fluid loss, prevent loss circulation, minimize differential pressures and prevent any wall sticking which may occur when drilling depleted zones. SB SuperCeal is a single sack additive which provides a micron range from 0 - 600 microns which was found to be the optimal range for bridging and sealing most permeable formations without the additions of any other materials. Packaged in 25 lb. sx./80 sxs. per pallet.





High Fluid Loss Squeeze Products

PRO BPX is an Cellulose Biopolymer LCM/Squeeze product which can be used as an "Aggressive LCM", "Squeeze Product" or "Pre-Cement Spacer" product. It is specially blended with loss circulation materials such as fibers, cellophane, resins and shells for ultimate performance and sealing capabilities. PRO V+ can be used in a wide range of applications, temperatures and densities. Packaged in 25 lb. sx./80 sxs. per pallet.

PRO HG is a high solids, high fluid loss proprietary blend squeeze product designed to plug loss circulation zones with large fractures. Packaged in 40 lb. sx./50 sxs. per pallet.

PRO V+ is an Acid Soluble "Hybrid" LCM/Squeeze product which can be used as an "Aggressive LCM", "Squeeze Product" or "Pre-Cement Spacer" product. It is specially blended with loss circulation materials such as fibers, cellophane, resins and shells for ultimate performance and sealing capabilities. PRO V+ can be used in a wide range of applications, temperatures and densities. Packaged in 25 lb. sx./80 sxs. per pallet.

PRO X is a Special Designed product with a larger percentage of larger particles designed to seal larger fractures. This is an Acid Soluble "Hybrid" LCM/Squeeze product to be used as an "Aggressive LCM", "Squeeze Product" or "Pre-Cement Spacer" product. Blended with loss circulation materials such as fibers, cellophane, resins and shells for ultimate performance and sealing capabilities to be used in a wide range of applications, temperatures and densities. Tested and compatible with water-based, oil-based and synthetic-based fluids. Packaged in 50 lb. sx./80 sxs. per pallet.





Additional Specialty Products

PRO GG (Gumbo Gone) is a proprietary blend that inhibits the hydration of the shale by forming a protective film that blocks entry of water into the shale. This protective film prevents hydration of the shale which helps reduce bit balling, collar plugging, sloughing, enlarged hole and hole-fill on trips.

Packaged in 5 gal. bkts. (36 bkts. per pallet)/55 gal. drums/275 gal. tote tanks.

PRO HD Riser Flush is a proprietary blend of selected water-soluble surfactants specifically designed for the clean-up of casing, drill pipe, and surface equipment during completion operations. PRO HD Riser Flush is specifically designed to work on synthetic based drilling fluids.

Packaged in 275 and 550 tote tanks.

PRO Slide is a Synthetic Based Drilling Fluid Lubricant. PRO Slide is environmentally friendly, non-hazardous, non-toxic, and formulated with inert, non-reactive polymers and special additives, which provides both extreme pressure (metal-to-metal) and borehole (metal-to-formation) lubricity. PRO Slide gives improved fluid loss and enhanced shale inhibition. PRO Slide is completely compatible with muds containing high hardness, divalent ion concentrations (i.e. lime muds), will not "grease out" regardless of hole conditions.

Packaged in 55 gal. drums/tote tanks.

PRO Spot lubricant spotting fluid is an emulsion mud product designed for freeing stuck pipe.


Packaged in 55 gal. drums/275 gal. tote tanks.

PRO Wash is an all purpose industrial water-soluble degreaser and general purpose cleaning compound.

Packaged in 5 gal. bkts. (36 bkts. per pallet)/55 gal. drums/tote tanks.



OUR SHALE PLAYS

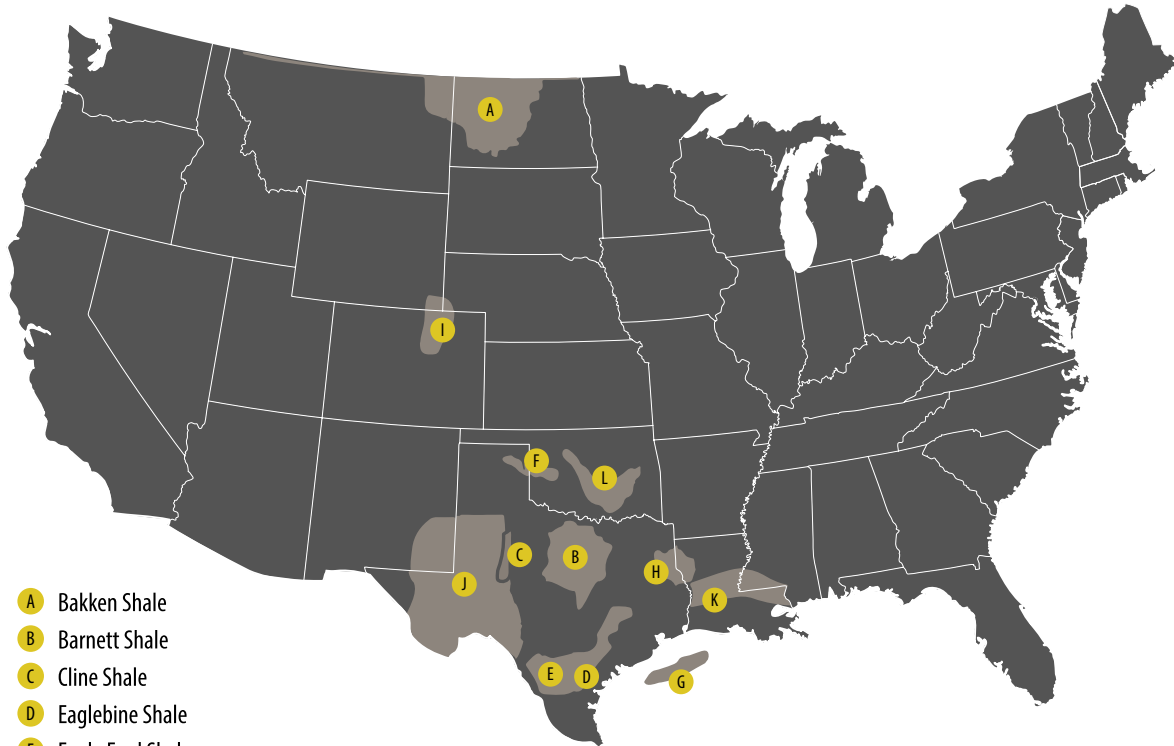

- A** Bakken Shale
- B** Barnett Shale
- C** Cline Shale
- D** Eaglebine Shale
- E** Eagle Ford Shale
- F** Granite Wash
- G** Gulf of Mexico, Shelf/Deepwater
- H** Haynesville Shale
- I** Niobrara Shale
- J** Permian Basin
- K** Tuscaloosa Shale
- L** Woodford Shale

Well Breakdown

Land Wells

3133

Offshore Wells


130

Inland
Water Wells

42

Deep
Water Wells


126

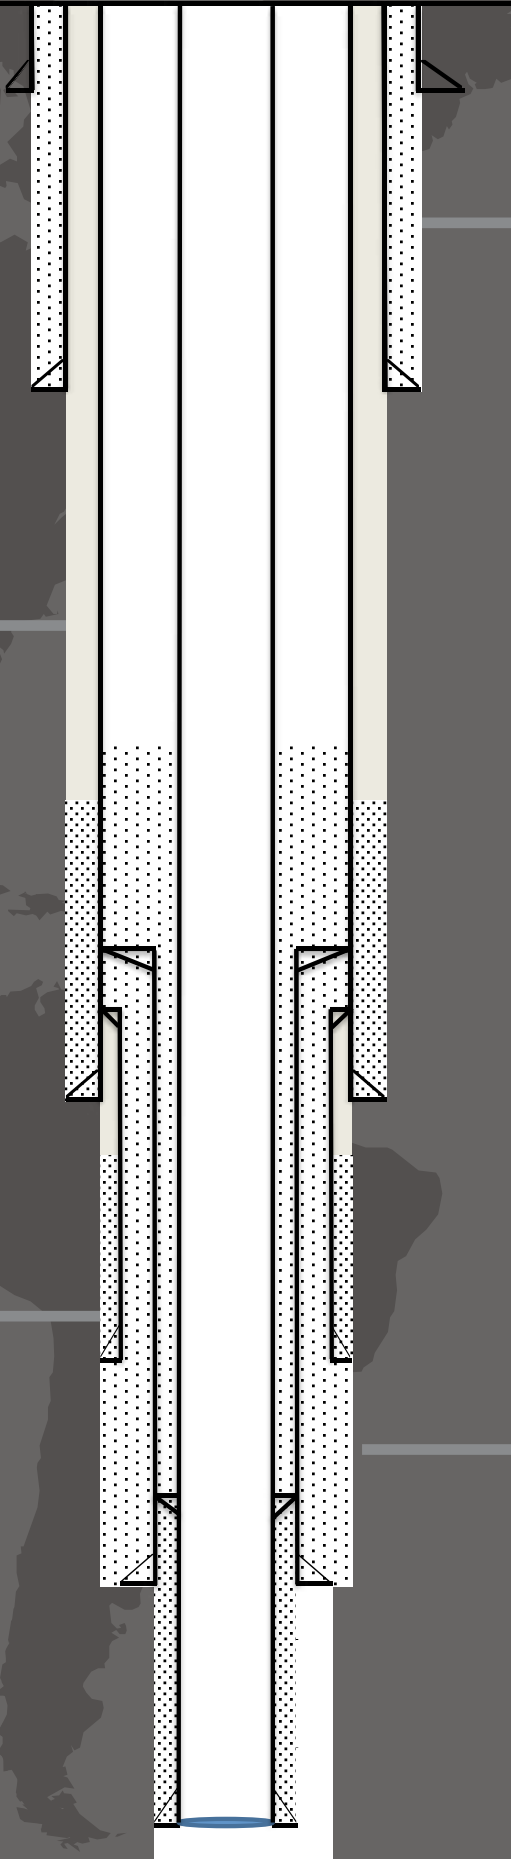

PROCOR CHEMICALS

combines a team of professionals with deep customer knowledge, superior engineering and innovative products.

PROCOR CHEMICALS PRODUCT APPLIED TO WELLS

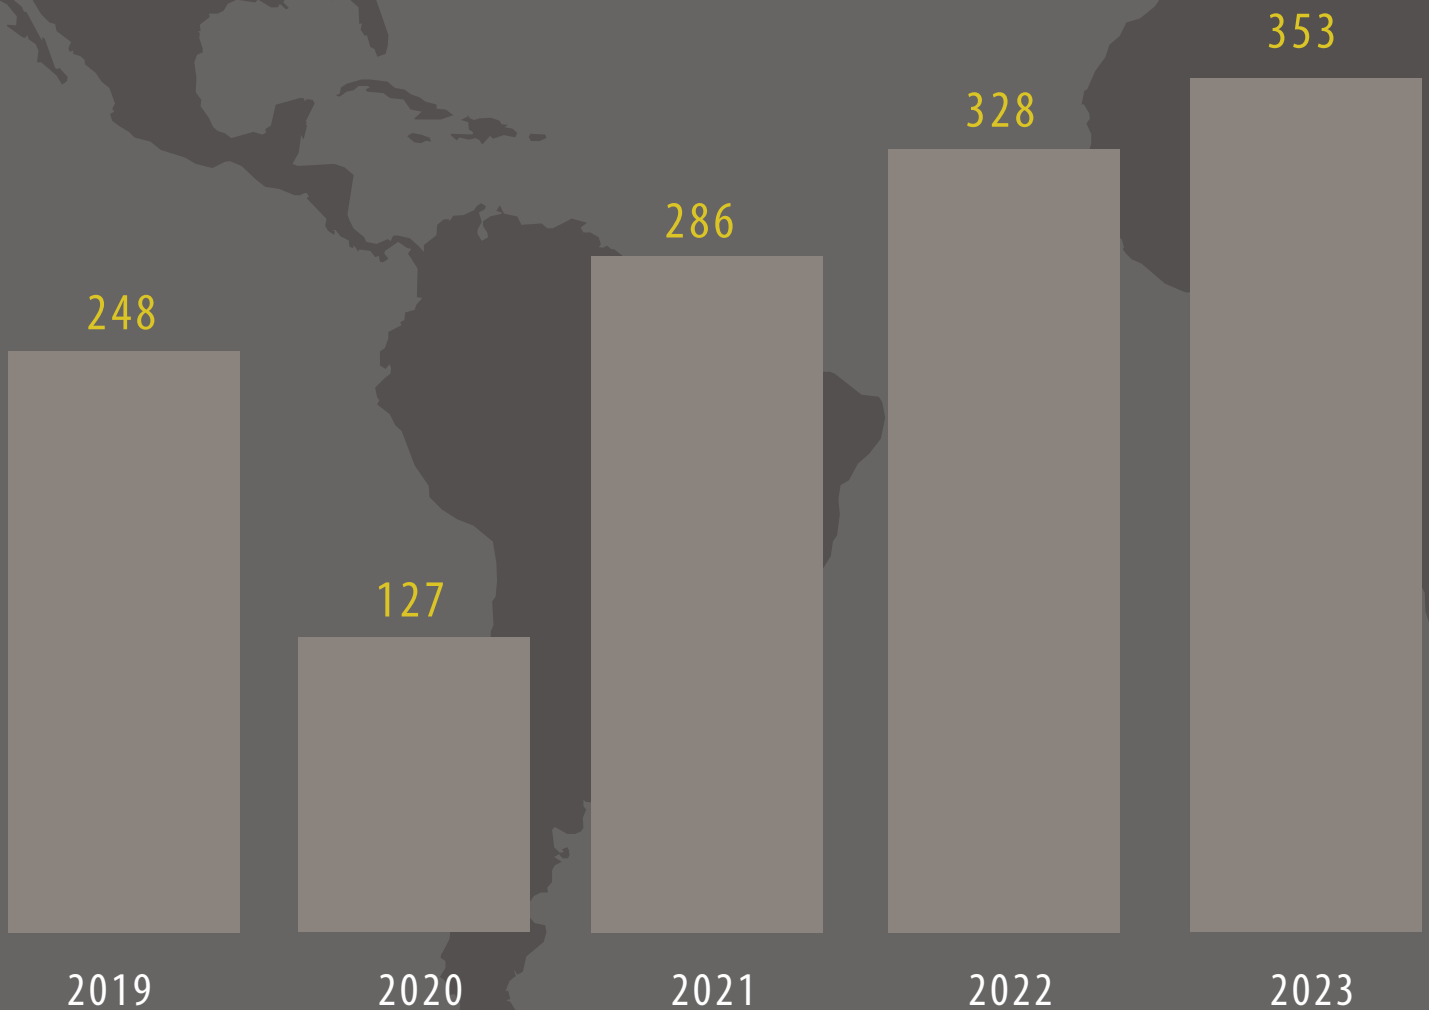



Warehouse Locations

Lafayette: 207 Commission Blvd., LA 70508

Port Allen: 2933 LA Hwy. 1, LA 70767

Longview: 1601 W Cotton St., TX 75604

Houston: 7707 Wallisville Rd., TX 75604

Corpus Christi: 4801 Baldwin Blvd., TX 78403

Odessa: 600 Industrial Ave., TX 79761

Myton: 31955 West 6250 South, UT 84052

Casper: 5370 W Poison Spider Rd, WY 82604

Williston: 103 8th Ave W, ND 58801

Ruffsdale: 362 Brickyard Hill Road, PA 15679